

dancoo
Quiet Simple Pods




S FAMILY

dancoo.com

S FAMILY

dancoo S1

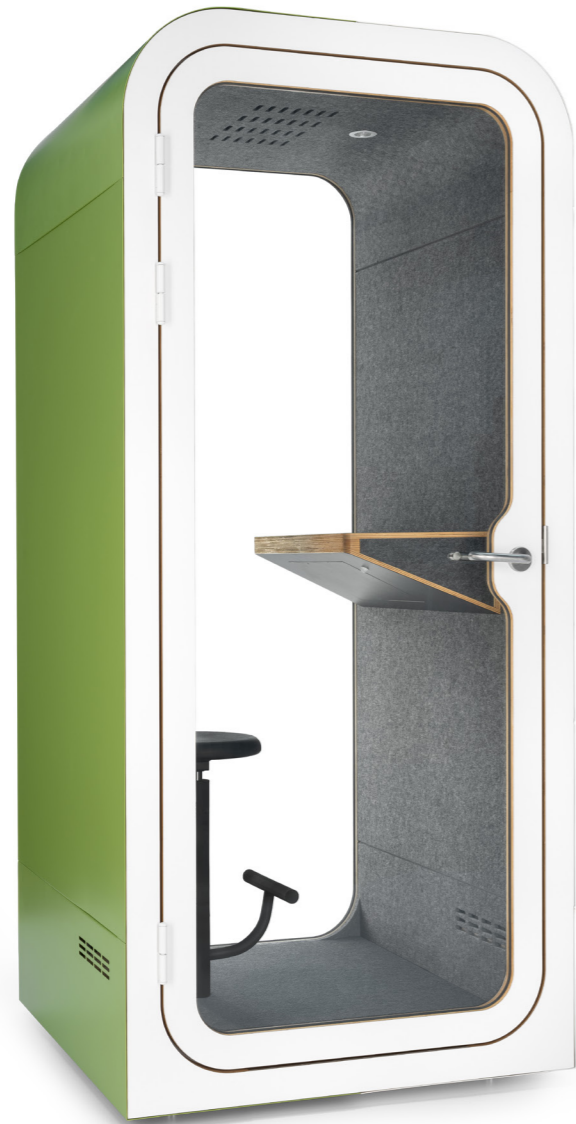

dancoo S1

Packaging and transportation

Net weight (kg)
360

Gross weight (kg)
452

UNIT/20GP
12

UNIT/40GP
24

UNIT/40HQ
24

Packaging size
2270 × 830 × 1130mm

Feature

Exterior
Powder coated steel

Glass (door & rear)
Sound control laminated glass

Frame and table
Laminate on birch plywood

Solid walls, roof and floor
A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt.
An anti-static and stain resistant low loop pile carpet for interior floor.

Weight
359.8

Measurements

Exterior (height, width, depth)
220 × 100 × 99cm

Interior (height, width, depth)
200 × 80 × 89.8cm

Door (height, width)
204.6 × 84.6cm

Table (width, depth, height)
65 × 30 × 16cm

Electric sockets are integrated on the table

Power consumption

Power consumption standard

3.24W while in use
LED light : 1.8W
Fans in total: 1.44W

0.75W standby power consumption or up on request

Power consumption option

LED light: LED brightness adjustment options
Fans in total: up to 14.4W
Input: 110-240VAC, 10A, 50/60Hz

Outlets

Regular table

Power socket + optional LAN cable (extra cost)

Output values

Output VAC (power socket): 100–240 VAC, 8 A, 50–60 Hz

Output USB charging: USB Type A socket, Type C option,
Maximum combined output 18 W

Air Ventilation

Air Ventilation Ventilation rate:

More than 1m³/ minute standard

Adjustable higher ventilation options

Acoustic performance

For speech level reduction (D_{s,a}) and Noise isolation class (NIC),
third party test reports are available per request

Certificates



• Specifications are subject to change without notice.

dancoo.com

S FAMILY

dancoo S2



dancoo S2

Packaging and transportation

Net weight (kg)
336

Gross weight (kg)
428

UNIT/20GP
12

UNIT/40GP
24

UNIT/40HQ
24

Packaging size
2270 × 830 × 1130mm

Feature

Exterior
Powder coated steel

Glass (door & rear)
Tempered glass

Frame and table
Laminate on birch plywood

Solid walls, roof and floor
A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt.
An anti-static and stain resistant low loop pile carpet for interior floor.

Weight
335.6

Measurements

Exterior (height, width, depth)
220 × 100 × 99cm

Interior (height, width, depth)
200 × 80 × 89.8cm

Door (height, width)
204.6 × 84.6cm

Table (width, depth, height)
65 × 30 × 16cm

Electric sockets are integrated on the table

Power consumption

Power consumption standard

3.24W while in use
LED light : 1.8W
Fans in total: 1.44W

0.75W standby power consumption or up on request

Power consumption option

LED light: LED brightness adjustment options
Fans in total: up to 14.4W
Input: 110-240VAC, 10A, 50/60Hz

Outlets

Regular table:

Power socket + optional LAN cable (extra cost)

Output values

Output VAC (power socket): 100–240 VAC, 8 A, 50–60 Hz

Output USB charging: USB Type A socket, Type C option,
Maximum combined output 18 W

Air Ventilation

Air Ventilation Ventilation rate:

More than 1m³/ minute standard

Adjustable higher ventilation options

Acoustic performance

For speech level reduction (D_{s,a}) and Noise isolation class (NIC),
third party test reports are available per request

Certificates



• Specifications are subject to change without notice.

dancoo.com

S FAMILY dancoo S



dancoo S

Packaging and transportation

Net weight (kg)
365

Gross weight (kg)
457

UNIT/20GP
12

UNIT/40GP
24

UNIT/40HQ
24

Packaging size
2270 × 830 × 1130mm

Feature

Exterior

Powder coated steel

Glass (door & rear)

Sound control laminated glass

Frame and table

Laminate on birch plywood

Solid walls, roof and floor

A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt.

An anti-static and stain resistant low loop pile carpet for interior floor.

Weight

365.2

Measurements

Exterior (height, width, depth)
220 × 100 × 99cm

Interior (height, width, depth)
200 × 80 × 89.8cm

Door (height, width)
204.6 × 84.6cm

Table (width, depth, height)
65 × 30 × 16cm

Electric sockets are integrated on the table

Power consumption

Power consumption standard

3.24W while in use

LED light :1.8W

Fans in total: 1.44W

0.75W standby power consumption or up on request

Power consumption option

LED light: LED brightness adjustment options

Fans in total: up to14.4W

Input: 110-240VAC, 10A, 50/60Hz

Outlets

Regular table:

Power socket + optional LAN cable (extra cost)

Output values

Output VAC (power socket): 100–240 VAC, 8 A, 50–60 Hz

Output USB charging: USB Type A socket, Type C option, Maximum combined output 18 W

Air Ventilation

Air Ventilation Ventilation rate:

More than 1m³/ minute standard

Adjustable higher ventilation options

Acoustic performance

For speech level reduction (D_{s,a}) and Noise isolation class (NIC), third party test reports are available per request

Certificates



• Specifications are subject to change without notice.

dancoo.com

S FAMILY

dancoo 2S1



dancoo 2S1

Packaging and transportatinon

Net weight (kg)
650

Gross weight (kg)
758

UNIT/20GP
5

UNIT/40GP
10

UNIT/40HQ
14

Packaging size
2270 × 1100 × 1330mm
+900 × 900 × 1100mm

Feature

Exterior

Powder coated steel

Glass (door & rear)

Sound control laminated glass

Frame and table

Laminate on birch plywood

Solid walls, roof and floor

A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt.

An anti-static and stain resistant low loop pile carpet for interior floor.

Weight

649.9

Measurements

Exterior (height, width, depth)
220 × 220 × 120cm

Interior (height, width, depth)
200 × 200 × 111cm

Door (height, width)
198.2 × 84.2cm

Table (width, depth, height)
70 × 53 × 64cm

Electrical sockets are integrated on the sofa

• Specifications are subject to change without notice.

Power consumption

Power consumption standard

6.48W while in use

LED light :3.6W

Fans in total: 2.88W

0.75W standby power consumption or up on request

Power consumption option

ED light: LED brightness adjustment options

Fans in total: up to 28.8W

Input: 110-240VAC, 10A, 50/60Hz

Outlets

Regular sofa:

Power socket + optional LAN cable (extra cost)

Output values

Output VAC (power socket): 100–240 VAC, 8 A, 50–60 Hz

Output USB charging: USB Type A socket, Type C option,
Maximum combined output 18 W

Air Ventilation

Air Ventilation Ventilation rate:

More than 2m³/ minute standard

Adjustable higher ventilation options

Acoustic performance

For speech level reduction (D_{s,a}) and Noise isolation class (NIC),
third party test reports are available per request

Certificates



S FAMILY

dancoo 2S2



dancoo 2S2

Packaging and transportation

Net weight (kg)
650

Gross weight (kg)
758

UNIT/20GP
5

UNIT/40GP
10

UNIT/40HQ
14

Packaging size
2270 × 1100 × 1330mm
+900 × 900 × 1100mm

Feature

Exterior
Powder coated steel

Glass (door & rear)
Sound control laminated glass

Frame and table
Laminate on birch plywood

Solid walls, roof and floor
A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt.
An anti-static and stain resistant low loop pile carpet for interior floor.

Weight
649.9

Measurements

Exterior (height, width, depth)
220 × 220 × 120cm

Interior (height, width, depth)
200 × 200 × 111cm

Door (height, width)
220 × 85cm

Table (width, depth, height)
70 × 53 × 64cm
Electrical sockets are integrated on the sofa

• Specifications are subject to change without notice.

Power consumption

Power consumption standard
6.48W while in use
LED light :3.6W
Fans in total: 2.88W

0.75W standby power consumption or up on request

Power consumption option
ED light: LED brightness adjustment options
Fans in total: up to 28.8W
Input: 110-240VAC, 10A, 50/60Hz

Outlets

Regular sofa:
Power socket + optional LAN cable (extra cost)

Output values

Output VAC (power socket): 100–240 VAC, 8 A, 50–60 Hz

Output USB charging: USB Type A socket, Type C option,
Maximum combined output 18 W

Air Ventilation

Air Ventilation Ventilation rate:
More than 2m³/minute standard
Adjustable higher ventilation options

Acoustic performance


For speech level reduction (D_{s,a}) and Noise isolation class (NIC),
third party test reports are available per request

Certificates



S FAMILY

dancoo 4S1

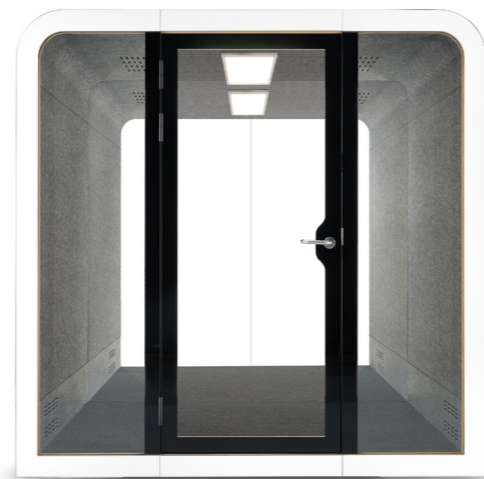

dancoo 4S1

Packaging and transportatinon

Net weight (kg)
1157

Gross weight (kg)
1327

UNIT/20GP
2

UNIT/40GP
4

UNIT/40HQ
8

Packaging size
2470 × 1000 × 1350mm × 2

Feature

Exterior
Powder coated steel

Glass (door & rear)
Sound control laminated glass

Frame
Laminate on birch plywood

Solid walls, roof and floor
A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt.
An anti-static and stain resistant low loop pile carpet for interior floor.

Weight
1070

Measurements

Exterior (height, width, depth)
220 × 220 × 243.6cm

Interior (height, width, depth)
200 × 200 × 237.2cm

Door (height, width)
198.2 × 84.2cm

Table (width, depth, height)
/

Power consumption

Power consumption standard
12.96W while in use

LED light :7.2W
Fans in total: 5.76W

0.75W standby power consumption or up on request

Power consumption option
ED light: LED brightness adjustment options
Fans in total: up to 57.6W
Input: 110-240VAC, 10A, 50/60Hz

Outlets

Regular wall or floor:
Power socket + optional LAN cable (extra cost)

Output values

Output VAC (power socket): 100–240 VAC, 8 A, 50–60 Hz

Output USB charging: USB Type A socket, Type C option,
Maximum combined output 18 W

Air Ventilation

Air Ventilation Ventilation rate:
More than 4m³/ minute standard

Adjustable higher ventilation options

Acoustic performance

For speech level reduction (D_{s,a}) and Noise isolation class (NIC),
third party test reports are available per request


Certificates



• Specifications are subject to change without notice.

S FAMILY

dancoo 4S2

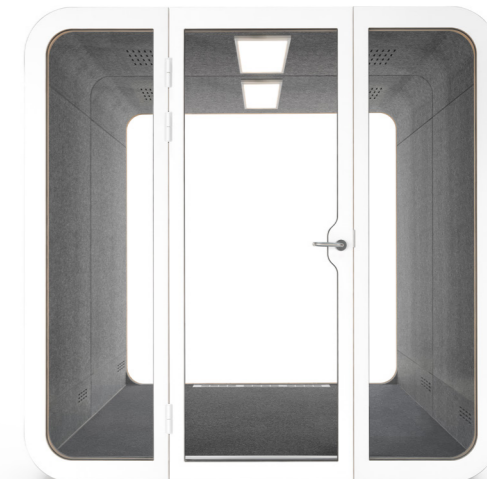

dancoo 4S2

Packaging and transportatinon

Net weight (kg)
1157

Gross weight (kg)
1327

UNIT/20GP
2

UNIT/40GP
4

UNIT/40HQ
8

Packaging size
2470 × 1000 × 1350mm × 2

Feature

Exterior
Powder coated steel

Glass (door & rear)
Sound control laminated glass

Frame
Laminate on birch plywood

Solid walls, roof and floor
A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt.
An anti-static and stain resistant low loop pile carpet for interior floor.

Weight
1070

Measurements

Exterior (height, width, depth)
220 × 220 × 243.6cm

Interior (height, width, depth)
200 × 200 × 237.2cm

Door (height, width)
220 × 85cm

Table (width, depth, height)
/

• Specifications are subject to change without notice.

Power consumption

Power consumption standard
12.96W while in use

LED light :7.2W
Fans in total: 5.76W

0.75W standby power consumption or up on request

Power consumption option
ED light: LED brightness adjustment options
Fans in total: up to 57.6W
Input: 110-240VAC, 10A, 50/60Hz

Outlets

Regular wall or floor:
Power socket + optional LAN cable (extra cost)

Output values

Output VAC (power socket): 100–240 VAC, 8 A, 50–60 Hz

Output USB charging: USB Type A socket, Type C option,
Maximum combined output 18 W

Air Ventilation

Air Ventilation Ventilation rate:
More than 4m³/ minute standard

Adjustable higher ventilation options

Acoustic performance

For speech level reduction (D_{s,a}) and Noise isolation class (NIC),
third party test reports are available per request

Certificates



dancoo.com



S FAMILY dancoo S1 / S2 / S / 2S1 / 2S2 / 4S1 / 4S2

Color options - Dancoo standard color




Color options - Exterior color options




Color options - Frame and table



Color options - Sofa Upholstery

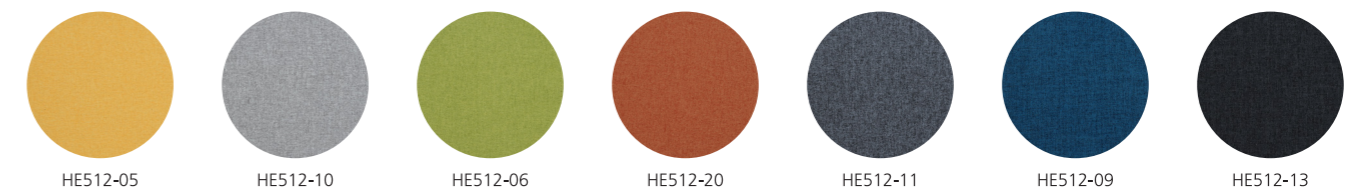

Color options - Interior - PET acoustic felt

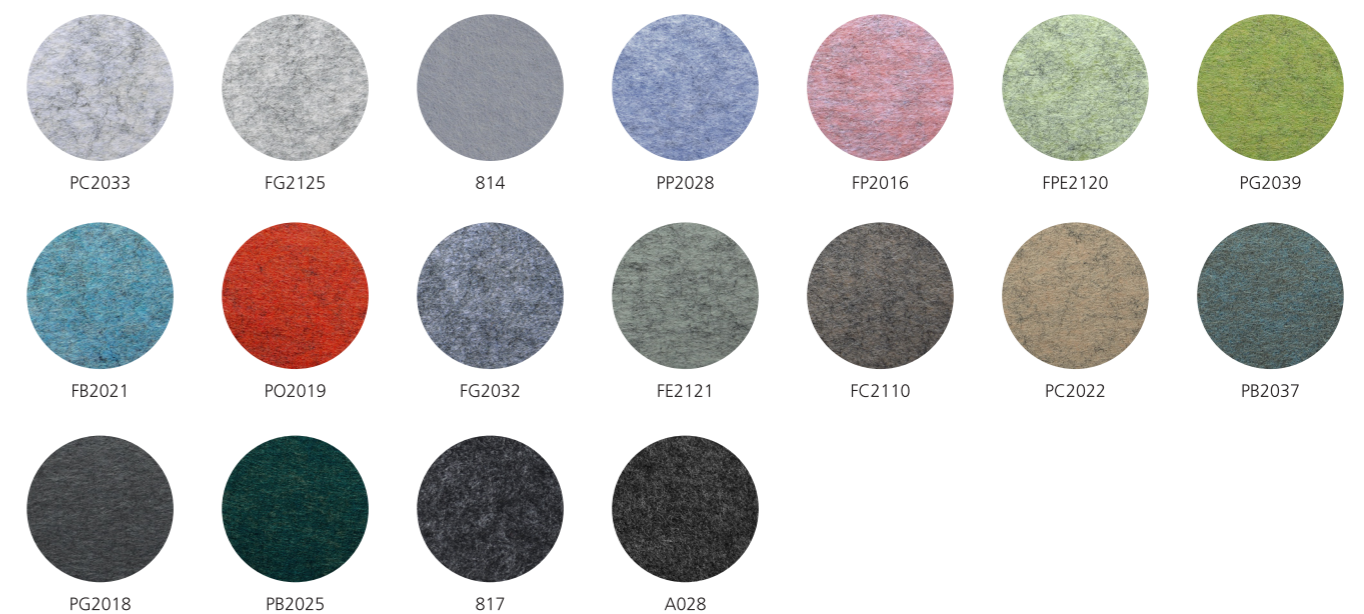

• The color number starting with F meets the requirements for the flame spread index and smoke developed index of class A Interior walls and ceilings finish category in accordance with ASTM E84-2021a

dancoo

Quiet Simple Pods

In our noisy and complex world
Quiet and simple is rare and appreciated
Quiet and simple is closer to truth

Quiet Simple Pods for Quiet Office

dancoo.com